PB TOP SERIES
SCISSOR LIFTS

PB S190-23ES 4x4
PB S225-23ES 4x4

Working height:
18,85 m / 22,30 m

Width:
2,26 m

Drive:
Electro-hydraulic
or
Diesel-hydraulic



PB PLATFORMERS BUSINESS

Technical highlights in series

- Strong & big & safe
- PB Mega Deck
- 4-wheel drive
- Autom. Supports system
- Differential lock

PB ARBEITSBÜHNEN

www.pblift.de

PB TOP SERIES

PB S190-23ES 4x4
PB S225-23ES 4x4

Working height:
18,85 m / 22,30 m

Width:
2,26 m

Antrieb:
Electro-hydraulic
or
Diesel-hydraulic



ARBEITSBÜHNEN

PB Lifttechnik GmbH
Gewerbegebiet Gassenäcker

Tel. +49 (0) 90 77 - 95 00 - 0

E-Mail: info@pblift.de
Website: www.pblift.de

PB TOP series	PB S190-23ES 4x4	PB S225-23ES 4x4
Operation area	In-/+outdoor	In-/+outdoor
Drive	Electro-hydraulic	Electro-hydraulic
Alternative Diesel Version	-	PB S225-23DS 4x4
Working height	18,85 m	22,30 m
Platform height - raised	16,85 m	20,30 m
Drivable at full height	Yes	Yes
Drive speed stowed / raised	5,4 / 0,50 km/h	5,4 / 0,50 km/h
Platform size (l x w)	4.50 x 2.22 m	4.50 x 2.22 m
Platform size max. (l x w)	7.20 x 2.22 m	7.20 x 2.22 m
Lift capacity	1000 kg	750 kg
Lift capacity extension	1000 kg	750 kg
Occupancy (in-+/outdoor)	4/4	4/4
Weight	13650 kg	14450 kg
Total length	4,84 m	4,84 m
Total width	2,26 m	2,26 m
Total height - stowed	3,68 m	3,83 m
Transport height (rails folded)	2,66 m	2,89 m
Turning radius (inside / outside)	0,52 m / 4,80 m	0,52 m / 4,80 m
Ground clearence - center	0,35 m	0,35 m
Gradeability	30 %	30 %
Perm. tilt angle (long-/lat. axis)	3°(0,3°supp.)	3°(0,3°supp.)
Battery capacity	625 Ah	625 Ah

Technical data are subject to change.

Technical highlights in series

- Strong & big & safe
- PB Mega Deck: Huge workspace
- 4-wheel-drive
- Auto. Supports system
- Differential lock



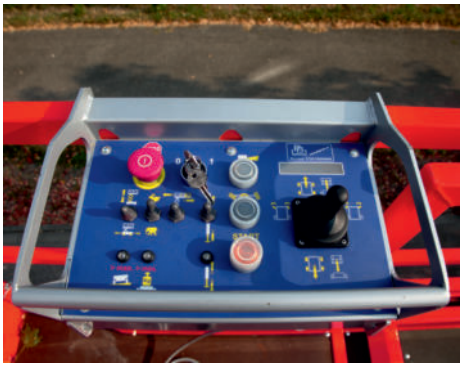





www.pblift.de