

PB TOP SERIES
SCISSOR LIFTS

PB S225-23DS 4x4
PB S225-23ES 4x4

Working height:
22,30 m

Width:
2,26 m

Drive:
Diesel-hydraulic
or
Electro-hydraulic



P PLATFORMERS
B BUSINESS

Technical highlights
in series

- Strong & big & safe
 - PB Mega Deck:
Huge workspace
 - 4-wheel-drive
- Autom. Supports system
 - Differential lock



www.pblift.de



PB TOP SERIES

PB S225-23DS 4x4

PB S225-23ES 4x4

Working height:
22,30 m

Width:
2,36 m

Drive:
Diesel-hydraulic
or
Electro-hydraulic



PB Liftechnik GmbH
Gewerbegebiet Gassenäcker

Phone +49 (0) 90 77 - 95 00 - 0

E-Mail: info@pblift.de
Website: www.pblift.de




PB TOP series	PB S225-23DS 4x4	PB S225-23ES 4x4
Operation area	In-/outdoor	In-/outdoor
Drive	Diesel-hydraulic	Electro-hydraulic
Working height	22,30 m	22,30 m
Platform height - raised	20,30 m	20,30 m
Drivable at full height	Yes	Yes
Drive speed stowed / raised	5,4 / 0,51 km/h	5,4 / 0,51 km/h
Platform size (l x w)	4,51 x 2,21 m	4,51 x 2,21 m
Platform size max. (l x w)	7,23 x 2,21 m	7,23 x 2,21 m
Lift capacity	750 kg	750 kg
Lift capacity extension	750 kg	750 kg
Occupancy (in-/outdoor)	4/4	4/4
Weight	13090 kg	15090 kg*
Total length	4,84 m	4,84 m
Total width	2,26 m	2,26 m
Total height - stowed	3,83 m	3,82 m
Transport height (rails folded)	2,91 m	2,90 m
Turning radius - outside	4,80 m	4,80 m
Ground clearance - center	0,28 m	0,28 m
Gradeability	30 %	30 %
Perm. tilt angle (long-/lat. axis)	3°(0,3°supp.)	3°(0,3°supp.)
Motor	Hatz Diesel 38,6 kW	25 kW
Battery capacity	180 Ah (Starter)	625 Ah5, 80 V

Technical data are subject to change.

Technical highlights in series

- Strong & big & safe
- PB Mega Deck: Huge workspace
 - 4-wheel-drive
- Autom. Supports system
 - Differential lock

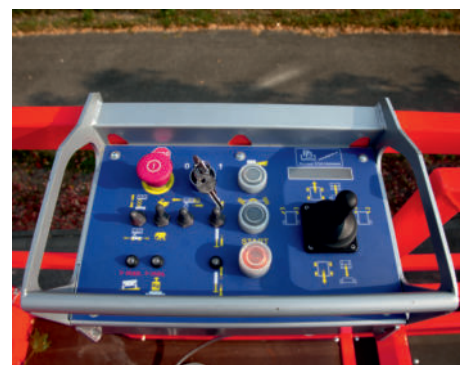

www.pblift.de