

PB TOP SERIES
SCISSOR LIFTS

PB TOP 14 & 24 series

Working height:
90,22 ft - 105,05 ft

Platform height:
83,66 ft - 98,48 ft

Width:
4,59 ft - 7,87 ft

Drive:
Electro-hydraulic or
Diesel-hydraulic




P_{LATFORMERS}
B_{USINESS}

Technical highlights in series

- Strong & powerful & big
 - 4-wheel-drive
 - 2-axis-steering
- PB Supports system:
 - optimum stability
 - PB Mega deck:
 - lot of workspace
- Emission-free & eco-friendly
& reliable



www.pblift.de

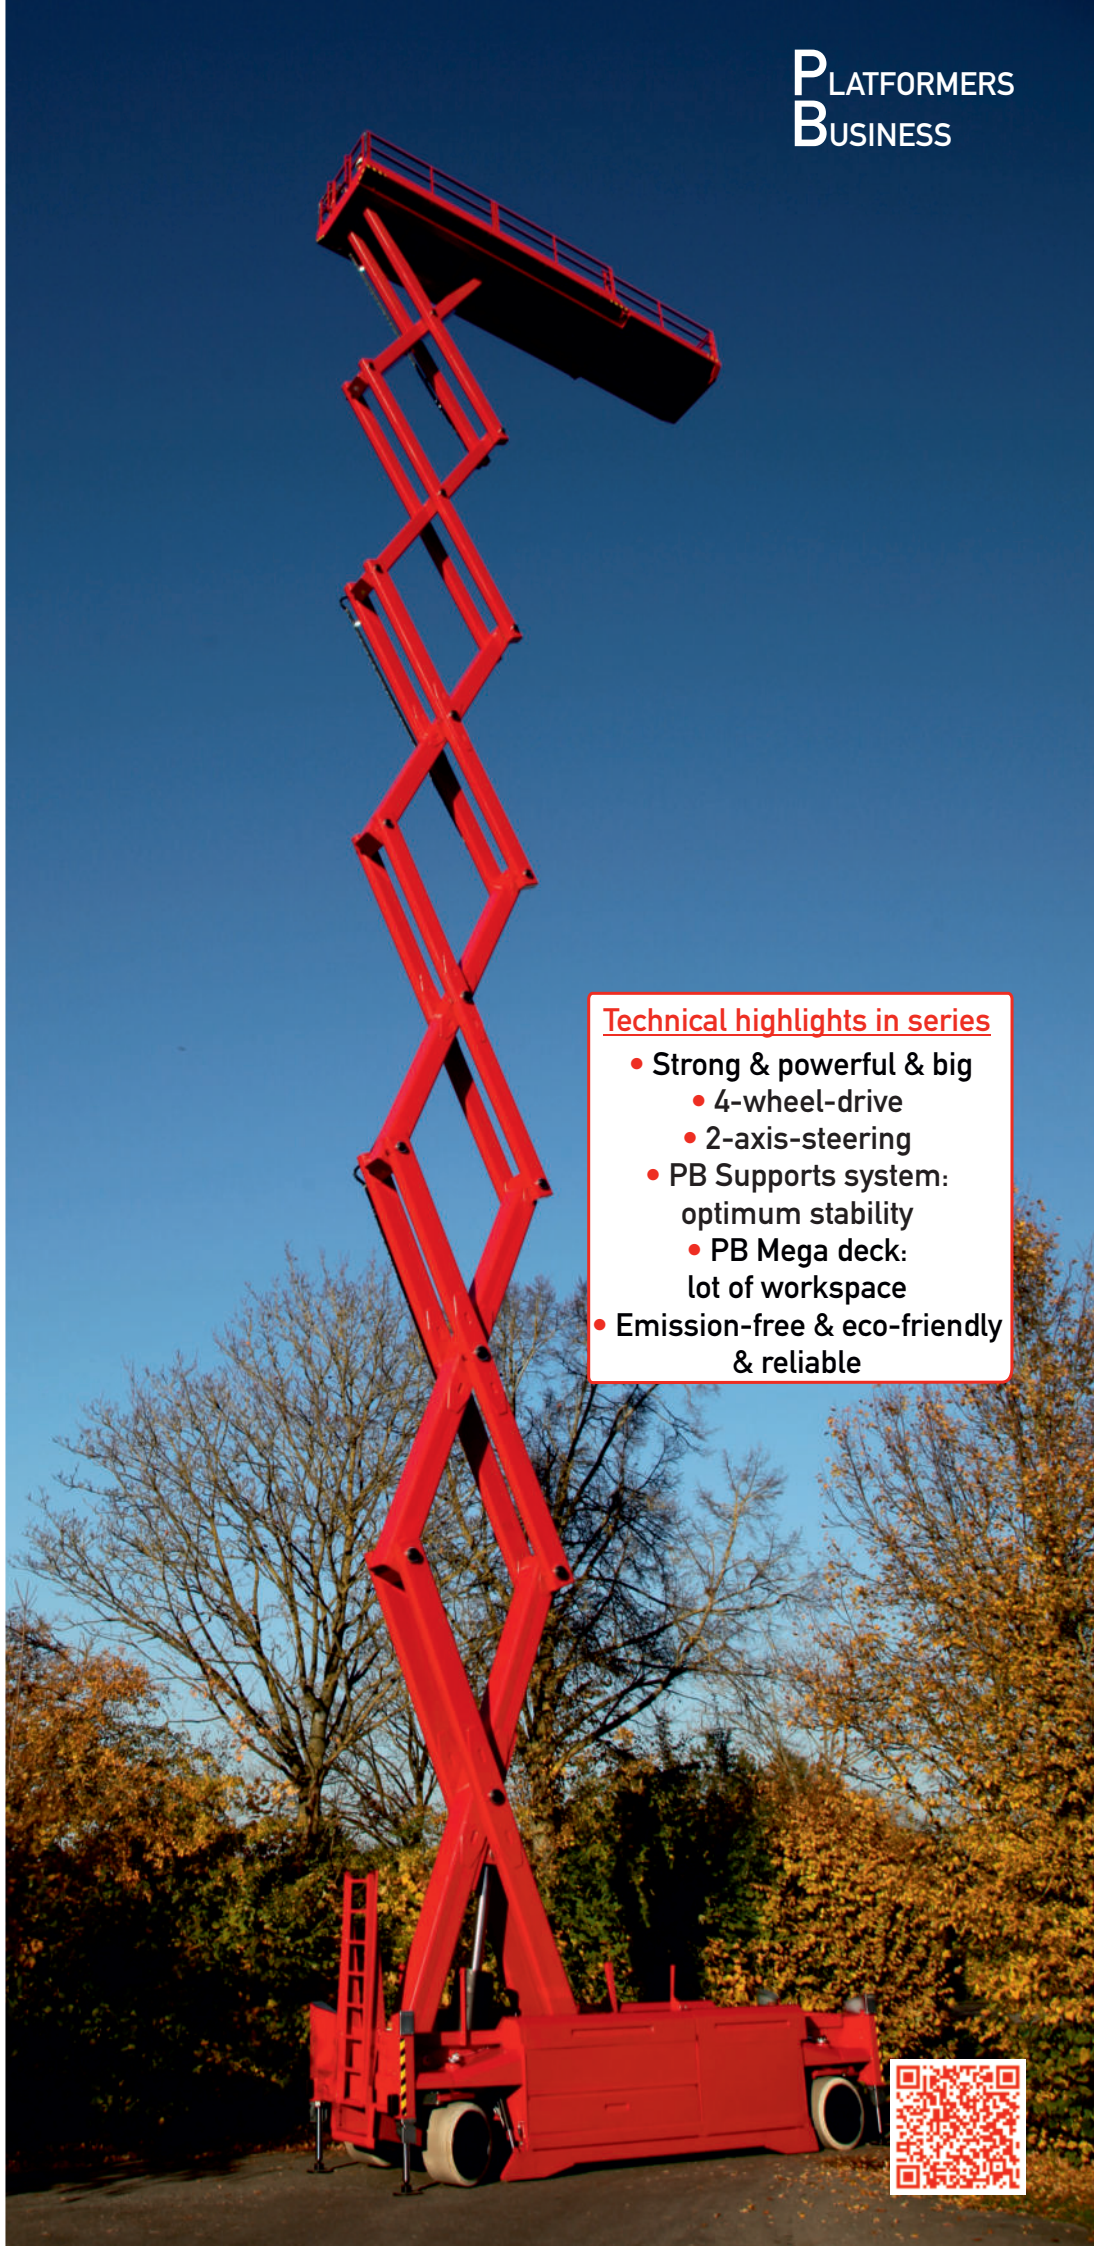

PB TOP 14 & 24 series

PB S280 Models
PB S320 Models

Working height:
90,22 ft - 105,05 ft

Platform height:
83,66 ft - 98,48 ft

Width:
4,59 ft - 7,87 ft

Drive:
Electro-hydraulic
or
Diesel-hydraulic



PB Lifstechnik GmbH
Gewerbegebiet Gassenacker

Phone +49 (0) 90 77 - 95 00 - 0

E-Mail: info@pblift.de
Website: www.pblift.de





PB TOP S275 S320 Models	PB S280-14ES 4x4	PB S280-24ES 4x4	PB S320-14ES 4x4	PB S320-24ES 4x4
Drive	Electro-hydraulic	Electro-hydraulic	Electro-hydraulic	Electro-hydraulic
Alternative Version	-	PB S280-24DS 4x4 -	-	PB S320-24DS 4x4
Alternative Drive	-	Diesel-hydraulic	-	Diesel-hydraulic
Operation area	In-/outdoor	In-/outdoor	In-/outdoor	In-/outdoor
Working height	90,22 ft	90,22 ft	105,05 ft	105,05 ft
Platform height - raised	83,66 ft	83,66 ft	98,49 ft	98,49 ft
Drivable at full height	Yes	Yes	Yes	Yes
Drive speed stowed / raised	1,92 / 0,20 mph	1,72 / 0,19 mph	1,92 / 0,20 mph	1,72 / 0,19 mph
Platform size (l x w)	20,18 x 3,94 ft	20,18 x 7,81 ft	20,18 x 3,94 ft	20,18 x 7,81 ft
Platform size max. (l x w)	25,10 x 3,94 ft	27,56 x 7,81 ft	25,10 x 3,94 ft	27,56 x 7,81 ft
Lift capacity	1984,16 lbs	1984,16 lbs	1653,47 lbs	1653,47 lbs
Lift capacity extension	1984,16 lbs	1984,16 lbs	1653,47 lbs	1653,47 lbs
Occupancy (in-/outdoor)	4/4	4/4	4/4	4/4
Weight Electro version	51411,30 lbs	57651,20 lbs	53858,93 lbs	59744,23 lbs
Weight Diesel Version	-	48788,29 lbs	-	55100,74 lbs
Total length	22,21 ft	22,38 ft	22,21 ft	22,38 ft
Total width	4,59 ft	7,87 ft	4,59 ft	7,87 ft
Total height - stowed	12,99 ft	12,53 ft	13,55 ft	13,42 ft
Transport height (rails folded)	9,19 ft	9,19 ft	10,07 ft	10,14 ft
Turning radius - outside	27,69 ft	27,69 ft	27,69 ft	27,69 ft
Ground clearance - center	0,89 ft	0,89 ft	0,89 ft	0,89 ft
Gradeability	25 %	25 %	25 %	25 %
Perm. tilt angle (long-/lat. axis)	1°(0,3°supp.)	1°(0,3°supp.)	1°(0,3°supp.)	1°(0,3°supp.)
Motor Electro version	25 kW, 80V	38 kW	25 kW, 80V	38 kW
Motor Diesel version	-	38,6 kW Hatz	-	38,6 kW Hatz
Battery capacity	800Ah	800Ah	800Ah	800Ah

Technical data are subject to change.

Technical highlights in series

- Strong & powerful & big
- 4-wheel-drive • 2-axis-steering
- PB Supports system:
optimum stability
- PB Mega deck: lot of workspace
- Emission-free & eco-friendly & reliable

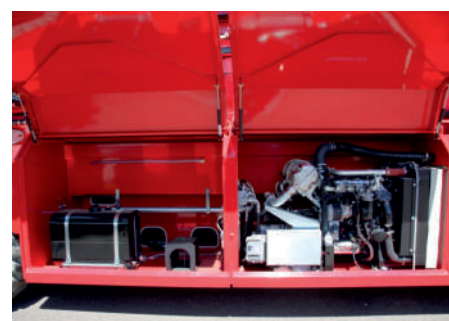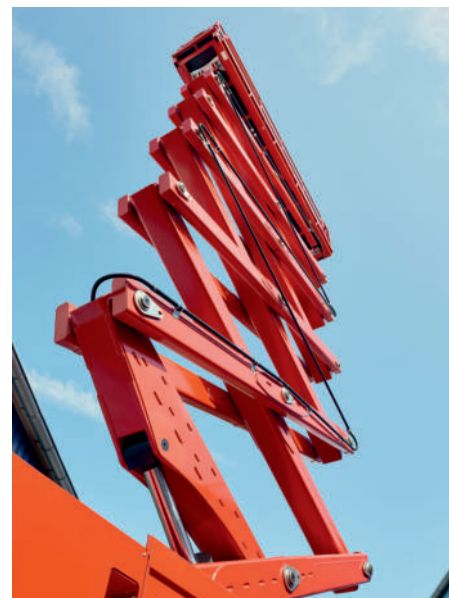

According and compliant to standards: ANSI/SAIA A92.20; CAN/CSA-B354.6; DIN EN 280-1; AS/NZS 1418.10

www.pblift.de