

PB TOP SERIES
SCISSOR LIFTS

PB TOP 14 & 24 series

Working height:
27,50 m - 32,02 m

Platform height:
25.50 m - 30.02 m

Width:
1,40 m - 2,40 m

Drive:
Electro-hydraulic or
Diesel-hydraulic




P_{LATFORMERS}
B_{USINESS}

Technical highlights in series

- Strong & powerful & big
- 4-wheel-drive • 2-axis-steering
- PB Supports system: optimum stability
 - PB Mega deck: lot of workspace
- Emission-free & eco-friendly & reliable



www.pblift.de

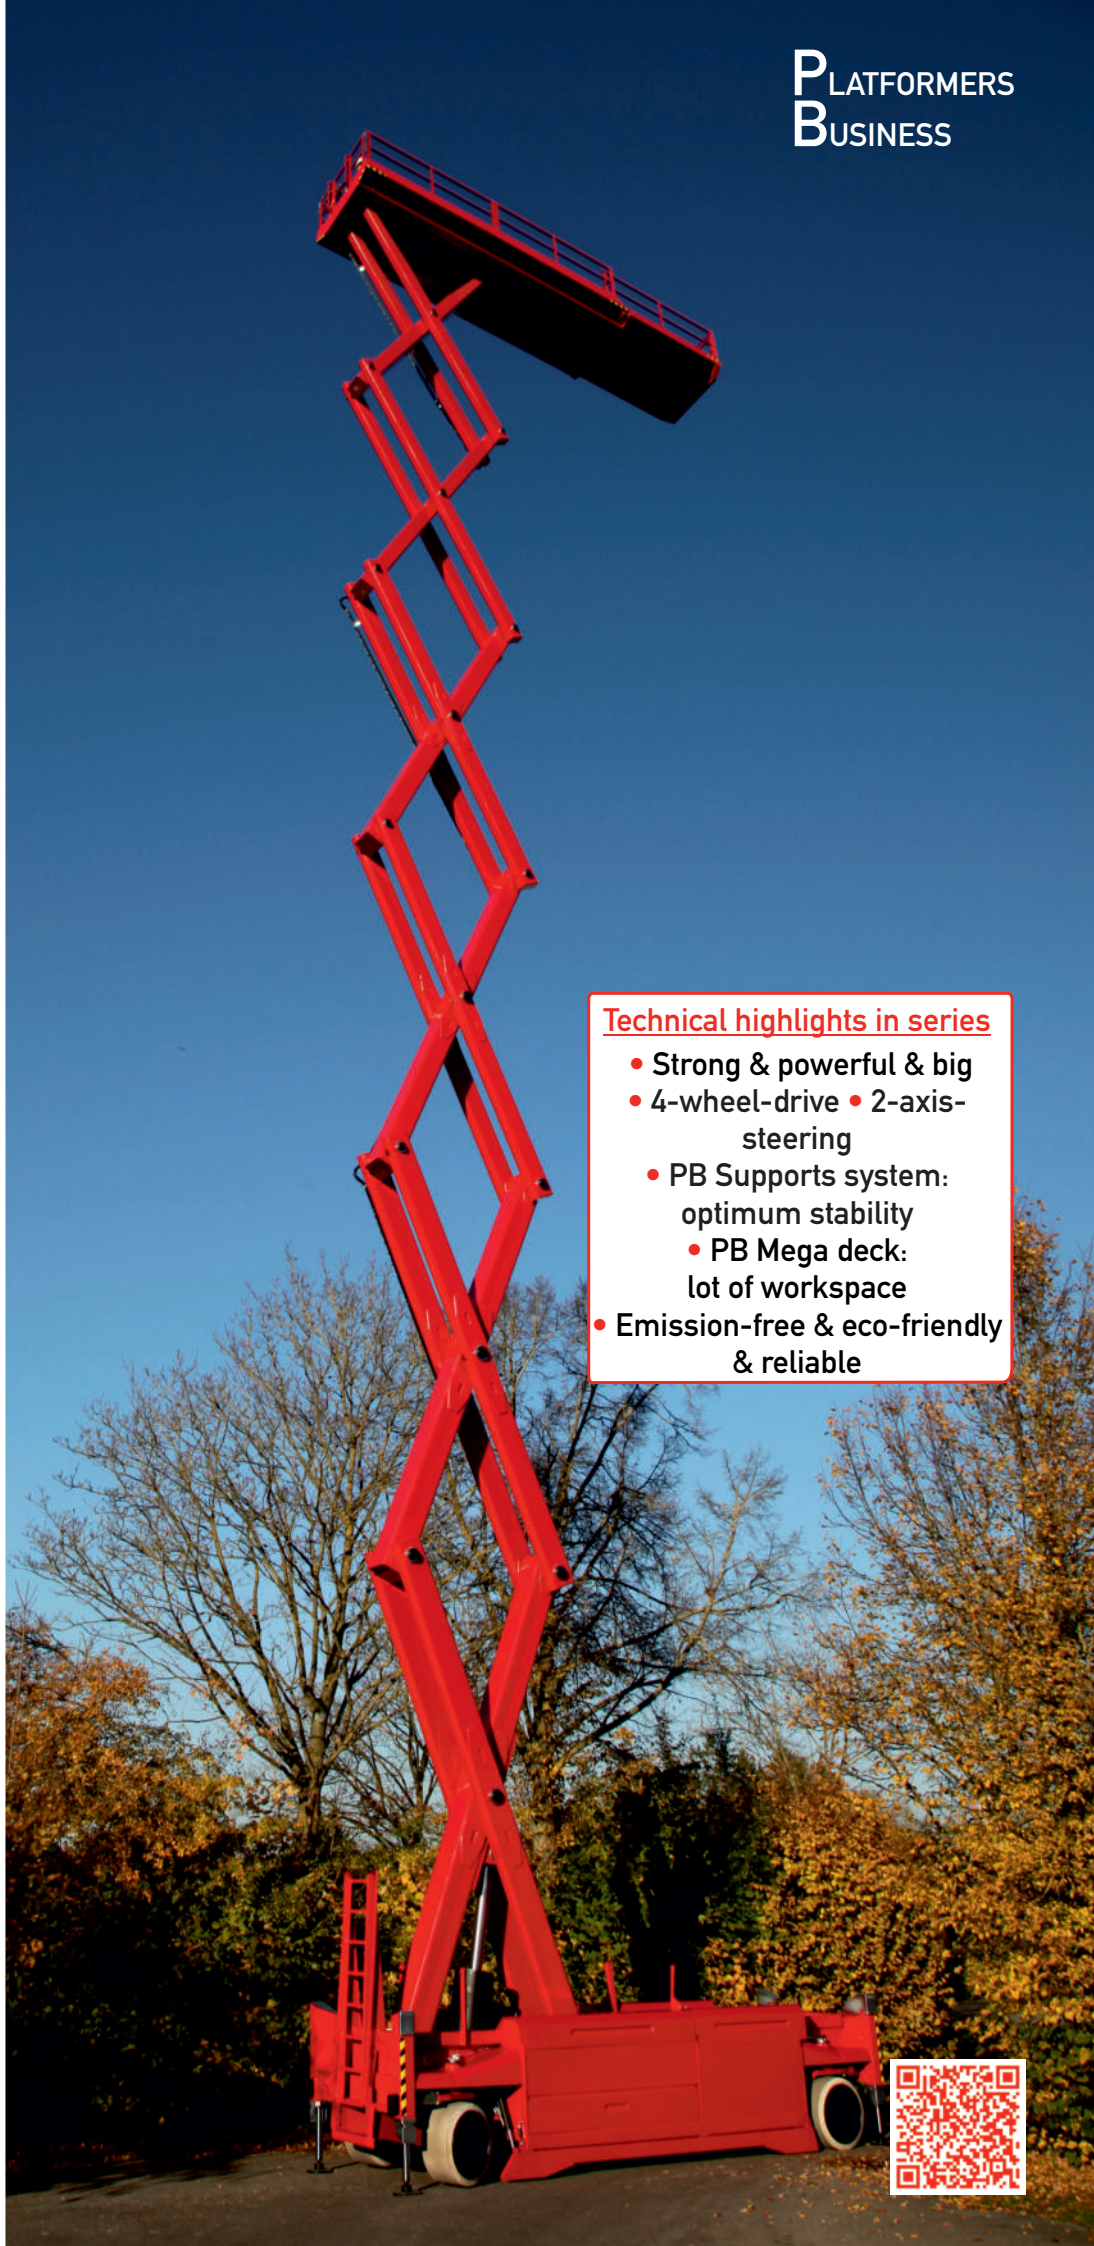

PB TOP 14 & 24 series

PB S280 Models
PB S320 Models

Working height:
27,50 m - 32,02 m

Platform height:
25,50 m - 30,02 m

Width:
1,40 m - 2,40 m

Drive:
Electro-hydraulic
or
Diesel-hydraulic



PB Liftechnik GmbH
Gewerbegebiet Gassenäcker

Phone +49 (0) 90 77 - 95 00 - 0

E-Mail: info@pblift.de
Website: www.pblift.de





PB TOP S275 S320 Models	PB S280-14ES 4x4	PB S280-24ES 4x4	PB S320-14ES 4x4	PB S320-24ES 4x4
Drive	Electro-hydraulic	Electro-hydraulic	Electro-hydraulic	Electro-hydraulic
Alternative Version	-	PB S280-24DS 4x4	-	PB S320-24DS 4x4
Alternative Drive	-	Diesel-hydraulic	-	Diesel-hydraulic
Operation area	Indoor	In-/outdoor	Indoor	In-/outdoor
Working height	27,50 m	27,50 m	32,02 m	32,02 m
Platform height - raised	25,50 m	25,50 m	30,02 m	30,02 m
Drivable at full height	Yes	Yes	Yes	Yes
Drive speed stowed / raised	3,10 / 0,32 km/h	2,77 / 0,3 km/h	3,10 / 0,32 km/h	2,77 / 0,3 km/h
Platform size (l x w)	6,15 m x 1,20 m	6,15 m x 2,38 m	6,15 m x 1,20 m	6,15 m x 2,38 m
Platform size max. (l x w)	7,65 m x 1,20 m	8,40 m x 2,38 m	7,65 m x 1,20 m	8,40 m x 2,38 m
Lift capacity	900 kg	900 kg	750 kg	750 kg
Lift capacity extension	900 kg	900 kg	750 kg	750 kg
Occupancy (in-/outdoor)	4/4	4/4	4/4	4/4
Weight Electro version	22570 kg	24.130 kg	24430 kg	27100 kg
Weight Diesel Version	-	22.130 kg	-	24990 kg
Total length	6,77 m	6,83 m	6,77 m	6,83 m
Total width	1,40 m	2,40 m	1,40 m	2,40 m
Total height - stowed	3,96 m	3,82 m	4,13 m	4,09 m
Transport height (rails folded)	2,80 m	2,82 m	3,07 m	3,09 m
Turning radius - outside	8,44 m	8,44 m	8,44 m	8,44 m
Ground clearance - center	0,27 m	0,27 m	0,27 m	0,27 m
Gradeability	25 %	25 %	25 %	25 %
Perm. tilt angle (long-/lat. axis)	1°(0,3°supp.)	1°(0,3°supp.)	1°(0,3°supp.)	1°(0,3°supp.)
Motor Electro version	20 kW, 80V	38 kW	20 kW, 80V	38 kW
Motor Diesel version	-	38,6 kW Hatz	-	38,6 kW Hatz
Battery capacity	800Ah	800Ah	800Ah	800Ah

Technical data are subject to change.

Technical highlights in series

- Strong & powerful & big
- 4-wheel-drive • 2-axis-steering
- PB Supports system:
optimum stability
- PB Mega deck: lot of workspace
- Emission-free & eco-friendly & reliable

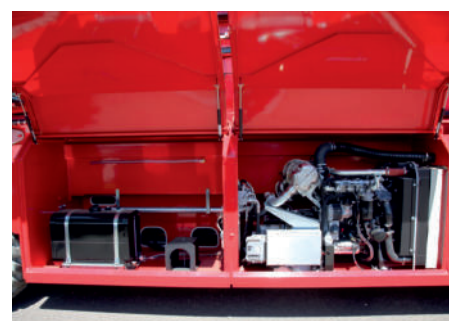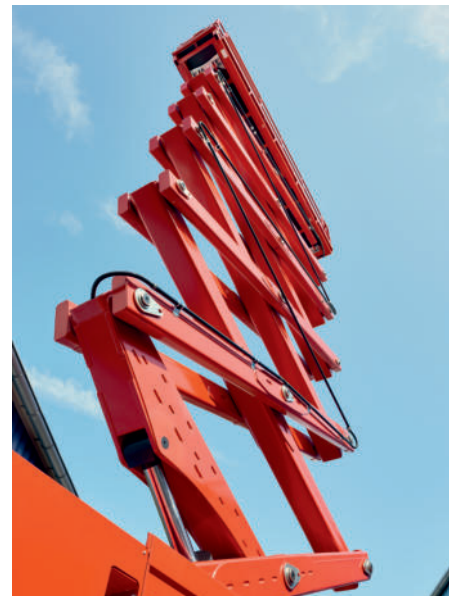

According and compliant to standards: ANSI/SAIA A92.20; CAN/CSA-B354.6; DIN EN 280-1; AS/NZS 1418.10

www.pblift.de