

PB TOP SERIES
SCISSOR LIFTS

PB TOP 14 & 24 series

Working height:
27,55 m - 32,23 m

Platform height:
25,55 m - 30,23 m

Width:
1,40 m - 2,40 m

Drive:
Electro-hydraulic or
Diesel-hydraulic



P
LATFORMERS
B
BUSINESS

Technical highlights in series

- Strong & powerful & big
- 4-wheel-drive • 2-axis-steering
- PB Supports system: optimum stability
 - PB Mega deck: lot of workspace
- Emission-free & eco-friendly & reliable



www.pblift.de



PB TOP 14 & 24 series

PB S280 Models
PB S320 Models

Working height:
27,55 m - 32,23 m

Platform height:
25,55 m - 30,23 m

Width:
1,40 m - 2,40 m

Drive:
Electro-hydraulic
or
Diesel-hydraulic



PB Liftechnik GmbH
Gewerbegebiet Gassenäcker

Phone +49 (0) 90 77 - 95 00 - 0

E-Mail: info@pblift.de
Website: www.pblift.de




| PB TOP S275 S320 Models | PB S280-14ES 4x4 | PB S280-24ES 4x4 | PB S320-14ES 4x4 | PB S320-24ES 4x4 |
|------------------------------------|-------------------|-------------------|-------------------|-------------------|
| Drive | Electro-hydraulic | Electro-hydraulic | Electro-hydraulic | Electro-hydraulic |
| Alternative Version | - | PB S280-24DS 4x4 | - | PB S320-24DS 4x4 |
| Alternative Drive | - | Diesel-hydraulic | - | Diesel-hydraulic |
| Operation area | In-/+/outdoor | In-/+/outdoor | In-/+/outdoor | In-/+/outdoor |
| Working height | 27,63 m | 27,55 m | 32,23 m | 32,22 m |
| Platform height - raised | 25,63 m | 25,55 m | 30,23 m | 30,22 m |
| Drivable at full height | Yes | Yes | Yes | Yes |
| Drive speed stowed / raised | 2,77 / 0,21 km/h | 2,70 / 0,30 km/h | 2,77 / 0,21 km/h | 2,70 / 0,30 km/h |
| Platform size (l x w) | 6,16 m x 1,20 m | 6,15 m x 2,39 m | 6,16 m x 1,20 m | 6,15 m x 2,39 m |
| Platform size max. (l x w) | 7,66 m x 1,20 m | 8,40 m x 2,39 m | 7,66 m x 1,20 m | 8,40 m x 2,39 m |
| Lift capacity | 900 kg | 900 kg | 750 kg | 750 kg |
| Lift capacity extension | 900 kg | 900 kg | 750 kg | 750 kg |
| Occupancy (in-/+/outdoor) | 4/4 | 4/4 | 4/4 | 4/4 |
| Weight Electro version | 23320 kg | 26.150 kg | 24430 kg | 27100 kg |
| Weight Diesel Version | - | 22.130 kg | - | 24990 kg |
| Total length | 6,79 m | 6,83 m | 6,79 m | 6,83 m |
| Total width | 1,40 m | 2,40 m | 1,40 m | 2,40 m |
| Total height - stowed | 3,88 m | 3,87 m | 4,10 m | 4,09 m |
| Transport height (rails folded) | 2,88 m | 2,87 m | 3,10 m | 3,09 m |
| Turning radius (inside/outside) | 2,37 m / 5,00 m* | 1,01 m / 4,73 m* | 2,37 m / 5,00 m* | 1,01 m / 4,73 m* |
| Ground clearance - center | 0,27 m | 0,27 m | 0,27 m | 0,27 m |
| Gradeability | 25 % | 25 % | 25 % | 25 % |
| Perm. tilt angle (long-/lat. axis) | 1°(0,3°supp.) | 1°(0,3°supp.) | 1°(0,3°supp.) | 1°(0,3°supp.) |
| Motor Electro version | 20 kW, 80V | 38 kW | 20 kW, 80V | 38 kW |
| Motor Diesel version | - | 38,6 kW Hatz | - | 38,6 kW Hatz |
| Battery capacity | 800 Ah | 930 Ah | 800 Ah | 930 Ah |

Technical data are subject to change. *with 2-axis-steering

Technical highlights in series

- Strong & powerful & big
- 4-wheel-drive • 2-axis-steering
- PB Supports system: optimum stability
- PB Mega deck: lot of workspace
- Emission-free & eco-friendly & reliable

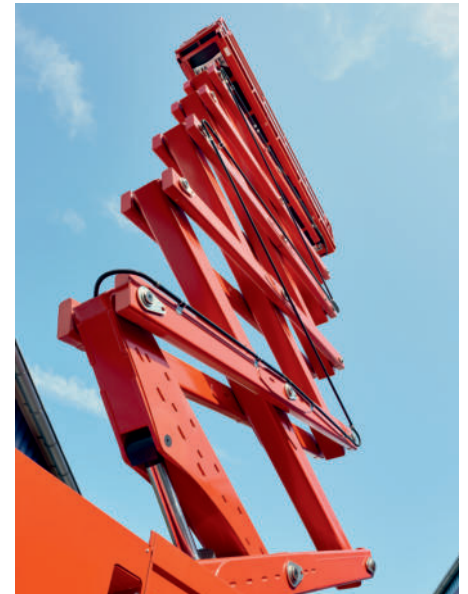

According and compliant to standards: ANSI/SAIA A92.20; CAN/CSA-B354.6; DIN EN 280-1; AS/NZS 1418.10

www.pblift.de